

Data Sheet for Precision Resistor

Voltage Divider (metal foil)

Series MLD



- Resistance range from 50Ω..30kΩ
- TCR up to ±2.5 ppm/°C
- Resistance tolerances absolute from ±0,05%, matching from ±0.02%
- Low current noise with excellent load life ratio stability

Electrical Specification	Absolute	Matching
Resistance range	50Ω..30kΩ (max. aggregate value 30kΩ)	
Resistance tolerance	±0.05%..±0.5%	±0.02%..±0.1%
Power rating @ 70°C (0W @ +125°C)	0,25W (each single element)	
TCR-rate	±2.5ppm/°C, ±5ppm/°C	Tracking
		Ratio
		Value
		R1 / R2 = 1 1 < R1 / R2 ≤ 10 10 < R1 / R2 ≤ 100 R1 / R2 > 100
Working temperature range (max.)	-25 °C up to +125 °C	

Mechanical Specification	
Resistance technology / material	Metal foil
Housing material	Epoxy
Connections	Radial cooper tinned


Parameters	Test Conditions	Specification	
		ΔR	Δ Ratio
Short time overload	2.5 x rated voltage, 5 sec.	±0.0025%	±0.001%
Life span (biased)	70°C, rated power, 90 min. on 30 min off, 1000 h	±0.01%	±0.005%
High temperature / humidity	+65°C..-10°C, 90..98% RH rated voltage, 10 cycles, 240h	±0.03%	±0.01%
Temperature shock	-25°C (30 min.), +25°C (5 min), +125°C (30 min), 5 cycles	±0.01%	±0.005%
High temperature exposure	+125°C, no load 1000 h	±0.01%	±0.005%
Solderability	235°C, 2 sec.	Abdeckung > 75%	
Resistance to soldering heat	350°C, 3 sec.	±0.0025%	±0.001%
Isolation resistance	100 VDC, 1 min.	>10.000MΩ	
Dielectric strength	Atmo. Pres.: 300 VAC, 1 min.	±0.0025%	±0.001%
Shock	50G, 11 ms, halfsine, X, Y, Z each 3 shocks	±0.005%	±0.001%
Vibration	20G, 10Hz zu 55Hz zu 10Hz, 1 min. X, Y, Z each 2h	±0.005%	±0.001%

Data Sheet for Precision Resistor


Voltage Divider (metal foil)

Series MLD


Frequency Characteristics

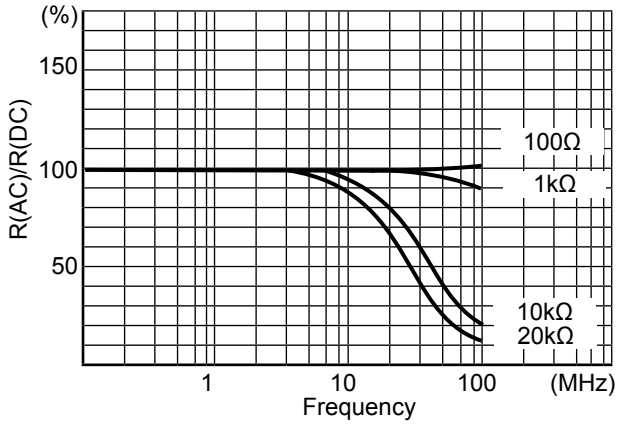

Power Derating Curve

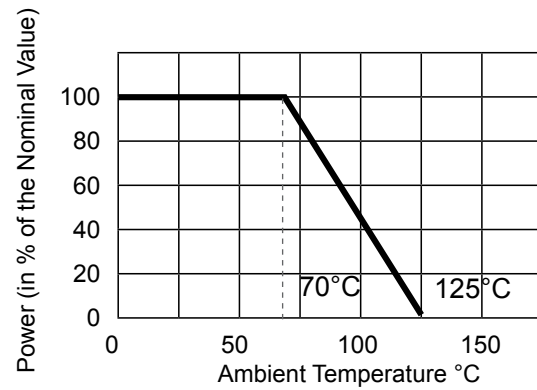

Drawing

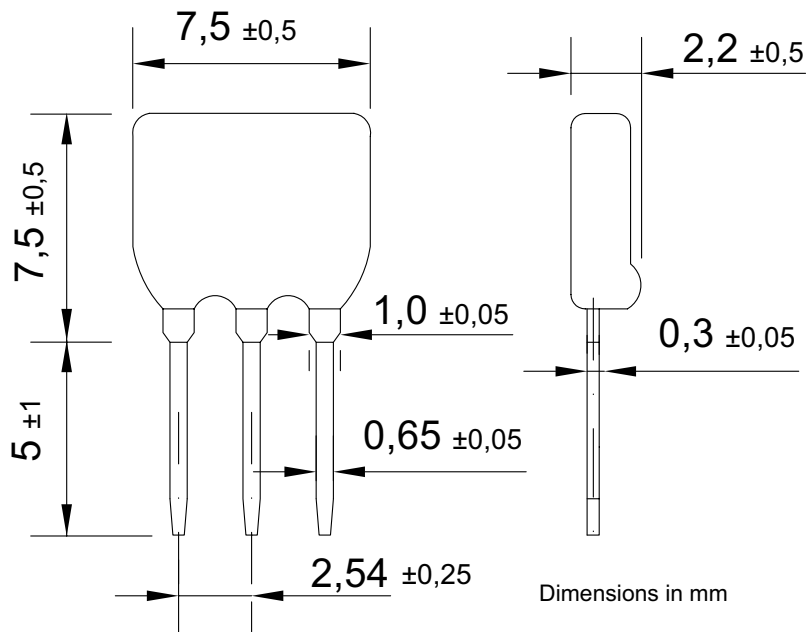

Data Sheet for Precision Resistor

Voltage Divider (metal foil)

Series MLD

Order code

Description

Selection: **standard=black/bold**, possible *options=grey/italic*

Series:	MLD					
Resistance tolerance absolute: ±0,5% @ R = 50Ω..100Ω ±0,1% @ R = 50Ω..30kΩ ±0,05% @ R = 100Ω..30kΩ		WA0,5% WA0,1% WA0,05%				
Resistance tolerance matching: ±0,1% @ R = 50Ω..30kΩ ±0,05% @ R = 50Ω..30kΩ ±0,02% @ R = 100Ω..30kΩ			WM0,1% WM0,05% WM0,02%			
Temperature coefficient absolute: ±5ppm/°C ±2,5ppm/°C				TK5 TK2,5		
Resistance value 1 - please choose: From 50Ω to ≤ 30kΩ (aggregate value max. 30kΩ)					xxkxxx	
Resistance value 2 - please choose: From 50Ω to ≤ 30kΩ (aggregate value max. 30kΩ)						/xxkxxx

Order Example	Series	Resistance tolerance absolute	Resistance tolerance matching	Temperature coefficient absolute	Resistance value 1	Resistance value 2
Choice	MLD	±0.1%	±0.1%	5ppm/°C	10,1kΩ	5kΩ
Code	MLD	WA0.1%	WM0.1%	TK5	10k100	/5k000